
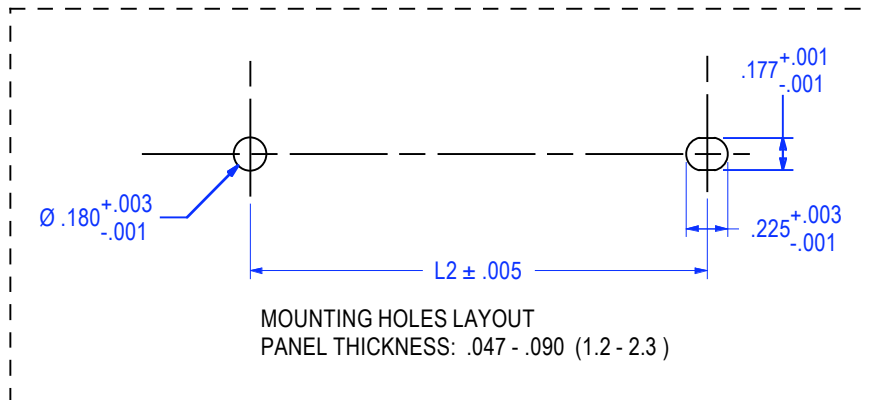


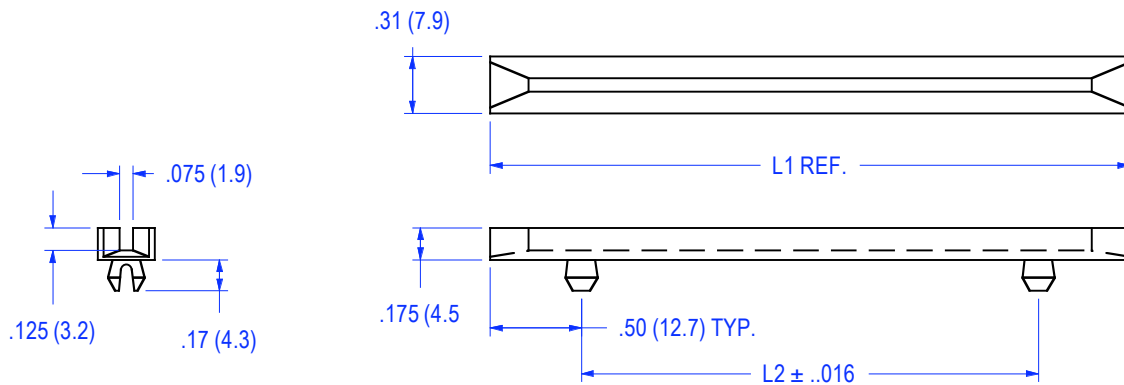

ITEM NO	L1		L2	
	REFERENCE		± .016	± 0.41
UL94-V2	IN.	mm	IN.	mm
14-04-250	2.5	(63.5)	1.5	(38.1)
14-04-300	3.0	(76.2)	2.0	(50.8)
14-04-350	3.5	(88.9)	2.5	(63.5)
14-04-400	4.0	(101.6)	3.0	(76.2)
14-04-450	4.5	(114.3)	3.5	(88.9)
14-04-500	5.0	(127)	4.0	(101.6)
14-04-550	5.5	(139.7)	4.5	(114.3)
14-04-600	6.0	(152.4)	5.0	(127)
14-04-650	6.5	(165.1)	5.5	(139.7)
14-04-700	7.0	(177.8)	6.0	(152.4)
14-04-750	7.5	(190.5)	6.5	(165.1)
14-04-800	8.0	(203.2)	7.0	(177.8)

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	E70062
COLOR	NATURAL
ASTM	D 4066, PA111
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	01

V-0 RATED NYLON AVAILABLE UPON REQUEST
TO ORDER ADD SUFFIX "X" TO PART NUMBER

PAKAGING: 500/BAG

					Name	Date	Title CARD GUIDES, 14-04 SERIES		
				Drawn By	lgf	07-07-03			
				Checked By					
				Tolerance, unless noted .XX = .010 .XXX = .005					
				ALL ELECTRONICS HARDWARE, INC. 2642 CORPORATE PARKWAY ALGONQUIN, ILLINOIS 60102 1 800 778 7234			Drawing Number 1404E		Issue E
E	Added Material Box	06/24/08	FL						
D	Changed tolerance of. L1	10/22/04	FL						
No	Revision	Date	By						
							File Number	1404CAT	06/24/08